



|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Idg  | 2705 |
| 145°    | TDZE     | 2066 |
|         | Apt Elev | 2066 |

RNAV (GPS) RWY 16

ELLS FLD/WILLITS MUNI (O28)

|                                                                                                                                                                                             |                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                             | MISSED APPROACH: Climb to 6000 direct HERMT and hold. |
| ▼<br>▲NA<br>Procedure NA at night. Circling NA west of Rwy 16-34.<br>Use Ukiah altimeter setting; when not received, procedure NA.<br>Rwy 16 helicopter visibility reduction below 1 SM NA. |                                                       |

|                     |                               |                          |
|---------------------|-------------------------------|--------------------------|
| UKI ASOS<br>119.275 | OAKLAND CENTER<br>132.2 350.3 | UNICOM<br>122.8 (CTAF) 0 |
|---------------------|-------------------------------|--------------------------|

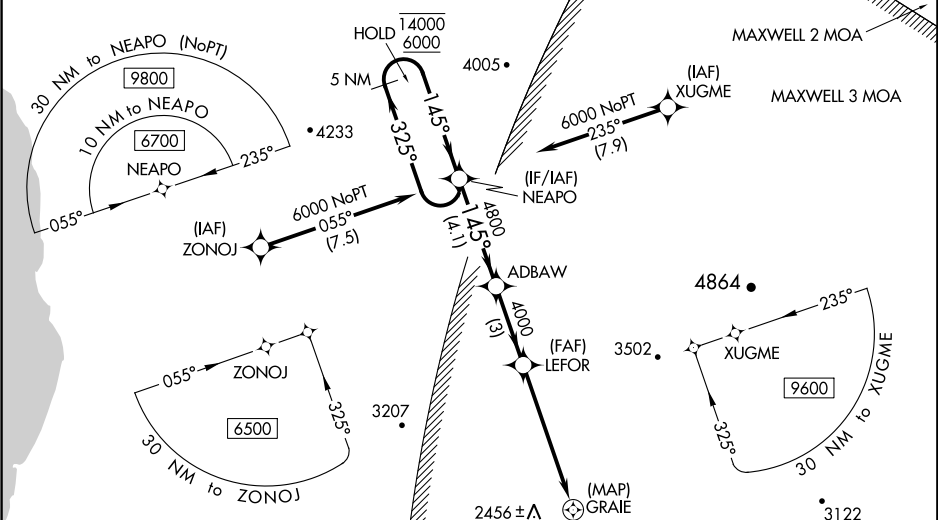

|           |           |
|-----------|-----------|
| ELEV 2066 | TDZE 2066 |
|-----------|-----------|

|                      |                           |                           |                         |    |
|----------------------|---------------------------|---------------------------|-------------------------|----|
| 5 NM Holding Pattern |                           |                           |                         |    |
| NEAPO                |                           |                           |                         |    |
| ADBAW                |                           |                           |                         |    |
| LEFOR                |                           |                           |                         |    |
| GRAIE                |                           |                           |                         |    |
| HERMT                |                           |                           |                         |    |
| 14000 ← 325°         |                           |                           |                         |    |
| 6000 ← 145°          |                           |                           |                         |    |
| 4800                 |                           |                           |                         |    |
| 4000                 |                           |                           |                         |    |
| 3.00° TCH 40         |                           |                           |                         |    |
| 4.1 NM               |                           |                           |                         |    |
| 3 NM                 |                           |                           |                         |    |
| 5.5 NM               |                           |                           |                         |    |
| 0.5 NM               |                           |                           |                         |    |
| CATEGORY             | A                         | B                         | C                       | D  |
| LNAV MDA             | 3620-1¼<br>1554 (1600-1¼) | 3620-1½<br>1554 (1600-1½) | 3620-3<br>1554 (1600-3) | NA |
| CIRCLING             | 3620-1¼<br>1554 (1600-1¼) | 3620-1½<br>1554 (1600-1½) | 3620-3<br>1554 (1600-3) | NA |

