

WAAS
CH **40113**
W08B


APP CRS
087°

Rwy Idg **10001**
TDZE **794**
Apt Elev **794**

RNAV (GPS) RWY 8R

GERALD R FORD INTL (G.R.R.)

RNP APCH.			MALSR		MISSED APPROACH: Climb to 2700 direct CAVUS and on track 085° to SARAN and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000. ** RVR 1800 authorized with use of FD or AP or HUD to DA.						
ATIS 118.725	GREAT LAKES APP CON ★ 128.4 257.6	GRAND RAPIDS TOWER★ 135.65 (CTAF) 339.8	GND CON 121.8	CLNC DEL 119.3	UNICOM 122.95	

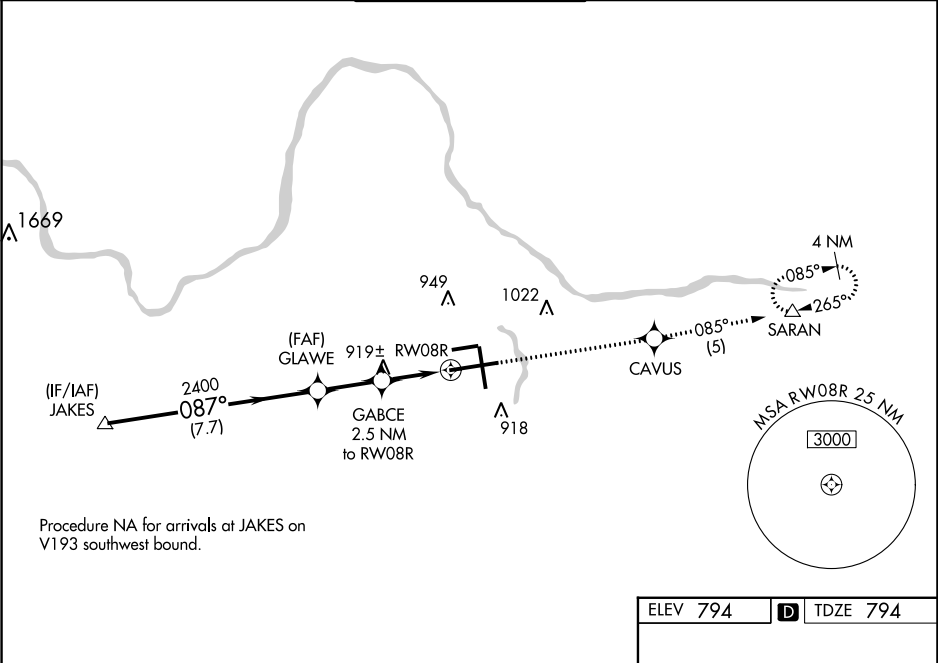

ELEV 794		D TDZE 794	
JAKES		2700	
2400		CAVUS	
GLAWCE		tr 085°	
GP 3.00° TCH 51		SARAN	
7.7 NM		*1.1 NM to RW08R	
2.3 NM		*1.1 NM to RW08R	
1.4 NM		*1.1 NM to RW08R	
1.1 NM		*1.1 NM to RW08R	
CATEGORY	A	B	C
LPV DA **	994/24		200 (200-½)
LNAV/VNAV DA	1297/50		503 (600-1)
LNAV MDA	1180/24	386 (400-½)	1180/35 386 (400-½)
CIRCLING	1260-1	466 (500-1)	1340-1½ 546 (600-1½)

1180/50 386 (400-1)	1360-2 566 (600-2)
------------------------	-----------------------

MIRL Rwy 8L-26R
REIL Rwy 8L, 17 and 26R
HIRL Rwy 8R-26L and 17-35